

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



10/528815



(43) International Publication Date
8 April 2004 (08.04.2004)

PCT

(10) International Publication Number
WO 2004/028949 A1

(51) International Patent Classification⁷: B66B 11/00

(21) International Application Number:
PCT/JP2003/012153

(22) International Filing Date:
24 September 2003 (24.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2002-277871 24 September 2002 (24.09.2002) JP

(71) Applicant (for all designated States except US):
TOSHIBA ELEVATOR KABUSHIKI KAISHA
[JP/JP]; 5-27, Kitashinagawa 6-chome, Shinagawa-ku,
Tokyo 141-0001 (JP).

[JP/JP]; 2064-2, Matsudo, Matsudo-shi, Chiba 271-0092
(JP). KAWASAKI, Kan [JP/JP]; 1-22-11-202, Inokashira,
Mitaka-shi, Tokyo 181-0001 (JP). ASAMI, Ikuo [JP/JP];
31-14-316, Hon-cho, Wako-shi, Saitama 351-0114 (JP).
TAKASAWA, Satoshi [JP/JP]; 2-21-14, Motoizumi,
Komae-shi, Tokyo 201-0013 (JP). FUJIMURA, Shun
[JP/JP]; 5-21-23-3, NAGAYAMA, Tama-shi, Tokyo
206-0025 (JP).

(74) Agents: YOSHITAKE, Kenji et al.; Kyowa Patent & Law
Office, Room 323, Fuji Bldg., 2-3, Marunouchi 3-chome,
Chiyoda-ku, Tokyo 100-0005 (JP).

(81) Designated States (national): AU, CN, KR, SG, US.

(84) Designated States (regional): European patent (AT, BE,
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU,
IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

(72) Inventors; and


(75) Inventors/Applicants (for US only): ISHII, Takashi

Published:

— with international search report

[Continued on next page]

(54) Title: ELEVATOR SYSTEM HAVING NO MACHINEROOM

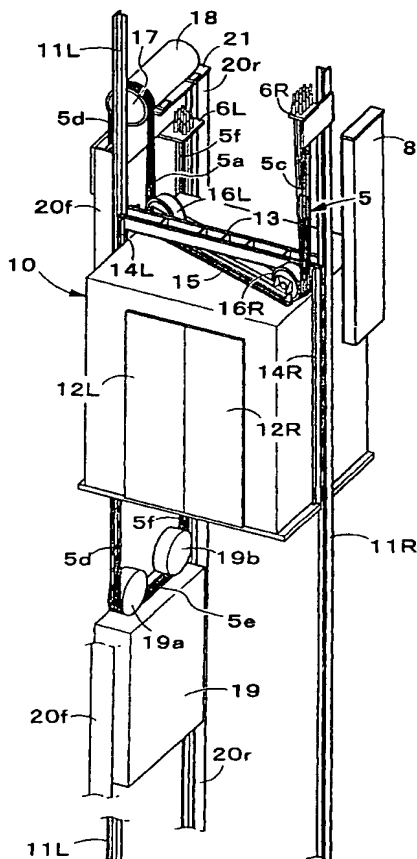

(57) Abstract: An elevator system having no machineroom is provided in which a height of a pit in a bottom of an elevator shaft can be reduced, a maintenance operation can be carried out at one on an upper part of the cage, and cage-side sheaves and cage-side guide rails can be disposed symmetrically with respect to the center of gravity of the cage. The elevator system having no machineroom includes a pair of right and left cage-side sheaves 16L and 16R disposed above a cage 10, and a traction sheave 17 disposed behind a cage-side guide rail 11L. The pair of right and left cage-side sheaves 16L and 16R are disposed such that each rotational angle of the pair of right and left cage-side sheaves 16L and 16R is extended parallel to a rotational axis of the traction sheave, or extended at a direction angle close to that of the rotational axis of the traction sheave.

WO 2004/028949 A1